
G-30 2007.2.27 10:34 AM ` 1 » ¿1-3 2032-175-" » T

SAMPLE SETTINGS

These suggested settings are provided as a starting point for discovering your own distinctive tones.

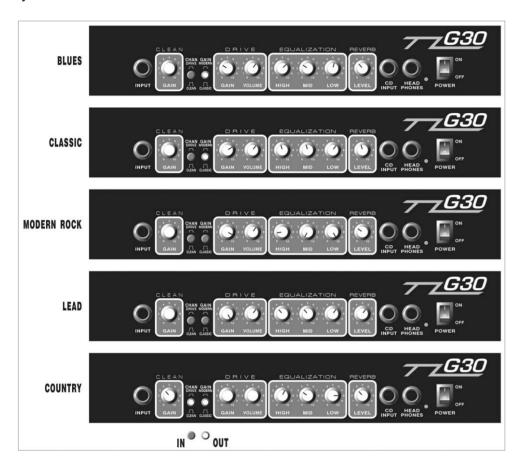

SPECIFICATIONS:

Power rating: 30 watts, 4 ohms

Speaker size: 10", 8 ohm loudspeaker Dimensions: 16.25"H x 17.5"W x 10.5"D

Weight: 25 lbs.

GENZ·BENZ

A Kaman Music Company, Bloomfield, CT 7811 E. Pierce Street, Scottsdale, AZ 85257 PH: 480-941-0705 FAX: 480-946-2412 www.genzbenz.com



model **G30**



OWNER'S MANUAL

Thanks for choosing TranZamp! Now that you have purchased this quality guitar amplifier, we are confident that after you have read through this manual you will be impressed with the versatility and tone.

TranZamp amplifiers are designed and manufactured under supervision of Genz Benz and have been geared for incredible output and tone.

GENZ-BENZ

|G-30 2007.2.27 10:34 AM ~ ` 2 » ¿1-3 2032-175-" » 7

FEATURES



INPUT - Standard 1/4" input. The input circuitry is designed to provide the best response from all current instrument pick-ups available. The great tone of the TranZamp starts here!

CLEAN CHANNEL - This GAIN control adjusts the natural, open, clean volume of the preamp. Turning this control past "5" may produce some natural distortion of the input stage, especially with high output pick-ups.

CHANNEL SELECTION SWITCH - This push button switch selects between the CLEAN and DRIVE channels. This function uses noiseless studio quality switching components. When using a single button footswitch, this button must be in the "out" position.

GAIN SELECTION SWITCH - The TranZamp design offers two gain structures for the DRIVE channel. In the "CLASSIC" position, the distortion is smooth and warm, reminiscent of the "classic era" of rock 'n roll. In the "MODERN" position, the gain structure is more aggressive with an incredible amount of sustain while continuing to keep the integrity of the individual notes and tone of the instrument. This versatile feature essentially makes the G30 operate as a three channel guitar amp.

DRIVE CHANNEL - The GAIN control adjusts the amount of overdriven saturation produced in the DRIVE channel. Use this control in conjunction with the VOLUME control for a wide variety of medium to heavy overdrive settings.

EQUALIZATION - The TranZamp design utilizes a wide range 3-band EQ network which is ideal for a variety of music styles. The response of the preamp is "flat" when all EQ controls are set to the "center" position.

REVERB - This control adjusts the amount of reverb that is mixed with the dry signal of the instrument.

CD INPUT - This jack is provided for the input of a CD player in order to practice to your favorite songs.

HEADPHONE JACK - Connect standard headphones (8-600 ohms impedance) here for silent rehearsals. The internal speaker is disconnected when the headphones are plugged in.

POWER LED - This green LED will illuminate when the amp is turned on.

POWER SWITCH - When this switch is pushed into the "up" position, power will be provided to the amplifier.

REAR PANEL

EXTENSION SPEAKER JACK - The TranZamp design is capable of driving another 8 ohm speaker cabinet. When used with an additional 8 ohm cabinet, the output from the TranZamp is truly remarkable.

CHANNEL FOOTSWITCH JACK - The CHANNEL selection function can be achieved by using a single button footswitch plugged into this jack. The front panel channel selection switch must be in the "out" position.

POWER CORD - Always plug the TranZamp into a grounded 120 volt, 60 cycle power outlet. Never disable the ground connection of the power cord.

SPEAKER ENCLOSURE

CABINETRY - The G30 is a durable, solid cabinet that will withstand the beating of back and forth trips to lessons or practice sessions. The solid back design of the cabinet helps deliver the high output punch.

G30 LOUDSPEAKER - Our 10" speaker has been specifically designed to reproduce the versatile tone of the TranZamp design.

WARRANTY:

Genz Benz Enclosures, Inc. warrants the TranZamp model G30 to be free from defects in materials and workmanship for a period of 1 year from the date of purchase.

This warranty does not cover normal wear and tear incurred from the designed use of the product.

All warranty service must be performed by a Genz Benz authorized service center.

Before returning any unit for service, a Return Merchandise Authorization (RMA) number must be obtained by calling Genz Benz at 480-941-0705.

WARNING!!! THERE ARE NO USER SERVICABLE PARTS INSIDE THIS UNIT. ALWAYS CONSULT A QUALIFIED SERVICE AGENT FOR SERVICE.

The use and operation of this device constitutes an agreement of full release of any and all liability connected with its use. In addition, by the use of this device, user agrees to hold both GENZ BENZ ENCLOSURES, INC. and it's designer, sales agents and all other affiliates and related parties harmless in the event of any accident, injury, damage or loss resulting from such use.